


Fittings

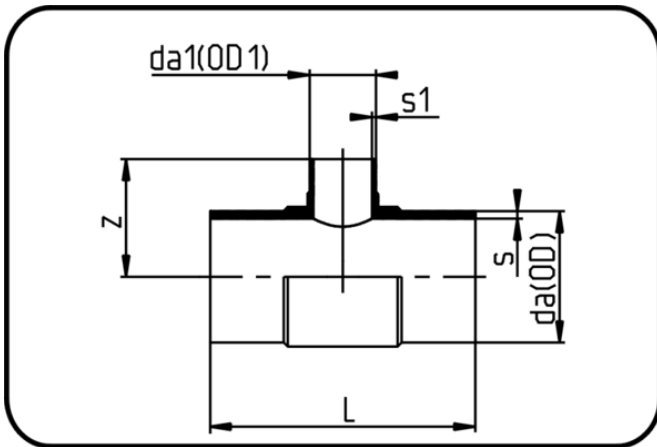

Code: 016

- Tee reduced
- short spigot
- injection moulded
- Butt+IR-welding
- PP Pure grey

Dimension	Code	Detail	da(OD) mm	da1(OD 1) mm	s mm	z mm	L mm	s1 mm	Weight
90/32	72.016.9032.11	90/32 SDR11 ISO S-5	90	32	8,2	85	213	2,9	0.567
90/50	72.016.9050.11	90/50 SDR11 ISO S-5	90	50	8,2	90	213	4,6	0.566
110/32	72.016.1132.11	110/32 SDR11 ISO S-5	110	32	10	94	244	2,9	0.907
110/50	72.016.1150.11	110/50 SDR11 ISO S-5	110	50	10	103	244	4,6	0.971
125/63	72.016.1263.11	125/63 SDR11 ISO S-5	125	63	11,4	112	280	5,8	1.377
140/63	72.016.1463.11	140/63 SDR11 ISO S-5	140	63	12,7	120	305	5,8	1.777
140/75	72.016.1475.11	140/75 SDR11 ISO S-5	140	75	12,7	130	305	6,8	2.02
140/90	72.016.1490.11	140/90 SDR11 ISO S-5	140	90	12,7	130	305	8,2	1.85
140/110	72.016.1411.11	140/110 SDR11 ISO S-5	140	110	12,7	140	305	10	2.126
160/125	72.016.1612.11	160/125 SDR11 ISO S-5	160	125	14,6	158	335	11,4	2.78
180/63	72.016.1863.11	180/63 SDR11 ISO S-5	180	63	16,4	134	367	5,8	2.98
180/75	72.016.1875.11	180/75 SDR11 ISO S-5	180	75	16,4	148	366	6,8	3.02
180/125	72.016.1812.11	180/125 SDR11 ISO S-5	180	125	16,4	166	366	11,4	3.24
225/125	72.016.2212.11	225/125 SDR11 ISO S-5	225	125	20,5	178	456	11,4	6.12
250/110	72.016.2511.11	250/110 SDR11 ISO S-5	250	110	22,7	197	450	10	8.19
250/160	72.016.2516.11	250/160 SDR11 ISO S-5	250	160	22,7	219	464	14,6	7.78